# Receiver Self-Test



Materials	. 2
Configuration file (Self-Test)	. 3
Magnetic Channels testers	. 4
Electric Channels Tester	5
GPS connection	. 6
Battery connection	. 7
Start Test	. 8
Field QC in EMpower	. 9
Acceptance Report	10
Technical Support Contact	11

1

Version: 230306

ID: DAA25


# **Materials**



Qty	Description
1	Computer with an EMpower license and SD card reader
1	SD card
1	Receiver under test
3	Magnetic channels test jig
1	GPS antenna and tripod assembly
1	GPS signal cable, GPS antenna to receiver
1	Self Test Jig
5	Test lead Banana to Banana 2 Black, 2 Red, and 1 Yellow
1	12V cable, Battery to Receiver
1	12V Battery

## **Configuration file (Self-Test)**

- 1. Open EMpower and click the **Prepare** button
- 2. Select the Receiver Type
- 3. Click the **Self-Test** button
- 4. Insert the SD card in the computer's SD card slot or use a USB memory card reader.
  - Click File menu / Save or Ctrl+S (see the Quick Start user manuals)

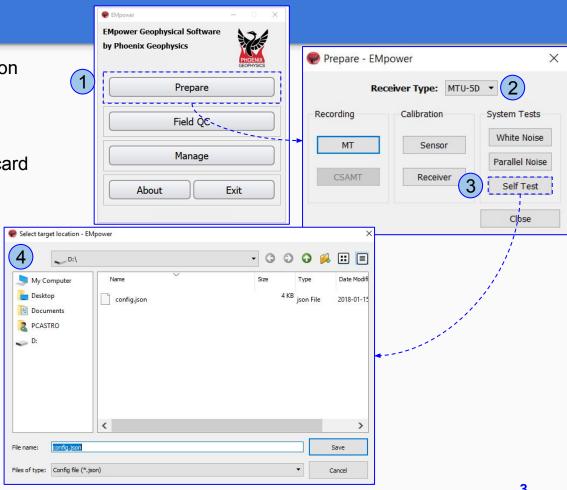



## **Magnetic Channels testers**

Connect the magnetic channels testers to each magnetic channel of the receiver (H1, H2, H3)








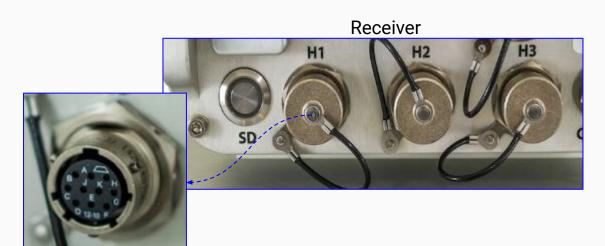

#### **Electric Channels tester**

- 1. Use the Black wires to connect South-South and West-West
- 2. Use the Red wires to connect North-North and East-East
- **3.** Use the Yellow wire to connect the Ground connectors





12V

#### **GPS** connection


- 1. Assemble the GPS antenna with the tripod
- 2. Connect the GPS cable from the GPS antenna





12V

## **Battery connection**

Use the battery cable to connect the MTU-5C receiver to the battery






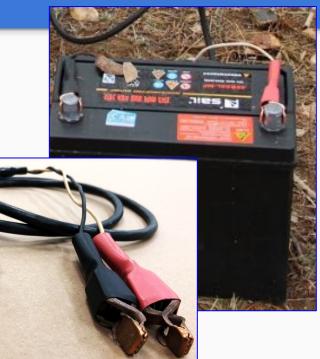


#### **Start Test**


- 1. Insert the SD Card into the receiver
- **2.** Press the Power button briefly
  - Wait until the receiver is ready to record
- **3.** To start the recording press the Power button briefly
- **4.** After 5 minutes, stop the recording by pressing the **Power** button briefly and releasing it
- **5.** To turn off the receiver press the Power button for 3sec and release it












### Field QC in EMpower


- Open the Field QC module in EMpower
- 2. Select View self-test results
- **3.** Review the results, there should be green check marks for every channel
- 4. If the Acceptance result shows a red cross \*
  - Check the connections and repeat the test
  - If the receiver repeats the same result, contact Phoenix Geophysics for support (see the last page)

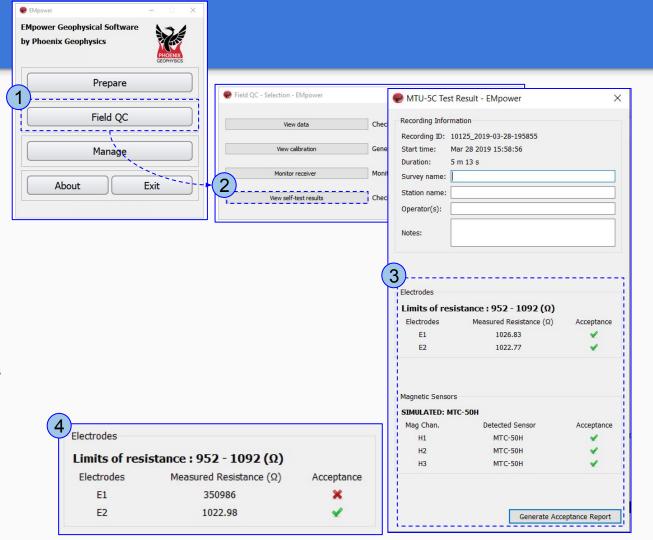

#### **Acceptance Report**

#### To export the report:

- 1. Click the Generate Acceptance
  Report button
- 2. Type the file name (PDF file) and Save
- 3. Review the Acceptance Report

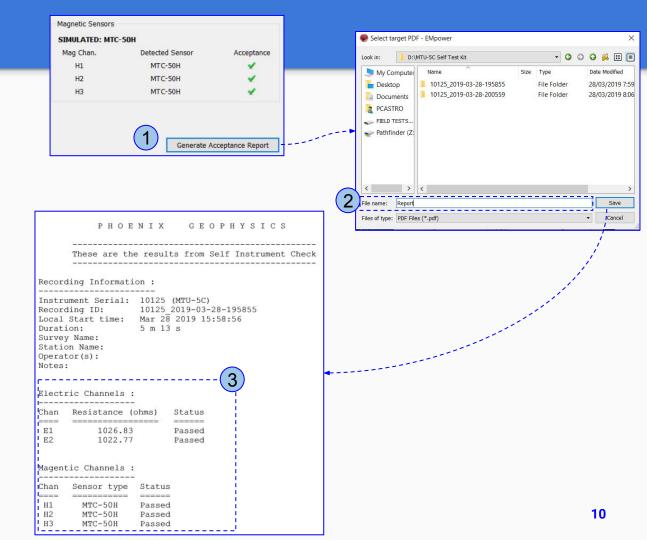

## **Technical Support Contact**



Please check out the <u>FAQs</u>
<a href="https://phoenixgeophysics.freshdesk.com/">https://phoenixgeophysics.freshdesk.com/</a>
Or email us at: support@phoenix-geophysics.com